


CONTINUOUS-SPRAY, SFN NOZZLE HOW TO ORDER SHEET

Choose from three lengths for versatility in any, continuous spray, design application. These nozzles feature 1/4-20 tapped (#10 screw clearance) mounting holes and durable, aluminum construction. The **Low Profile** nozzle provides a unique space saving design.

Part Number

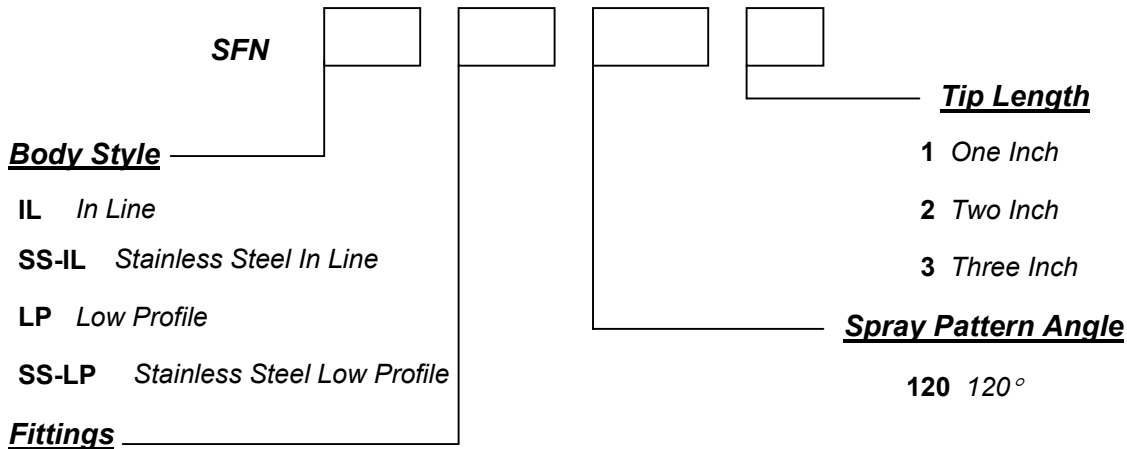

Oil Lines: Nylon: 3/16" O.D. Tubing Steel Tube: 1/8" O.D. Tubing

Air Lines: Nylon: 1/4" O.D. Tubing Steel Tube: 1/4" O.D. Tubing


NC Nylon Compression Ftg.-**Standard**

NY Nylon Push-In Tube Ftg.

CS Carbon Steel Ftg.(Steel Tubing)

SS Stainless Steel Ftg. (Steel Tubing)

X No Fittings

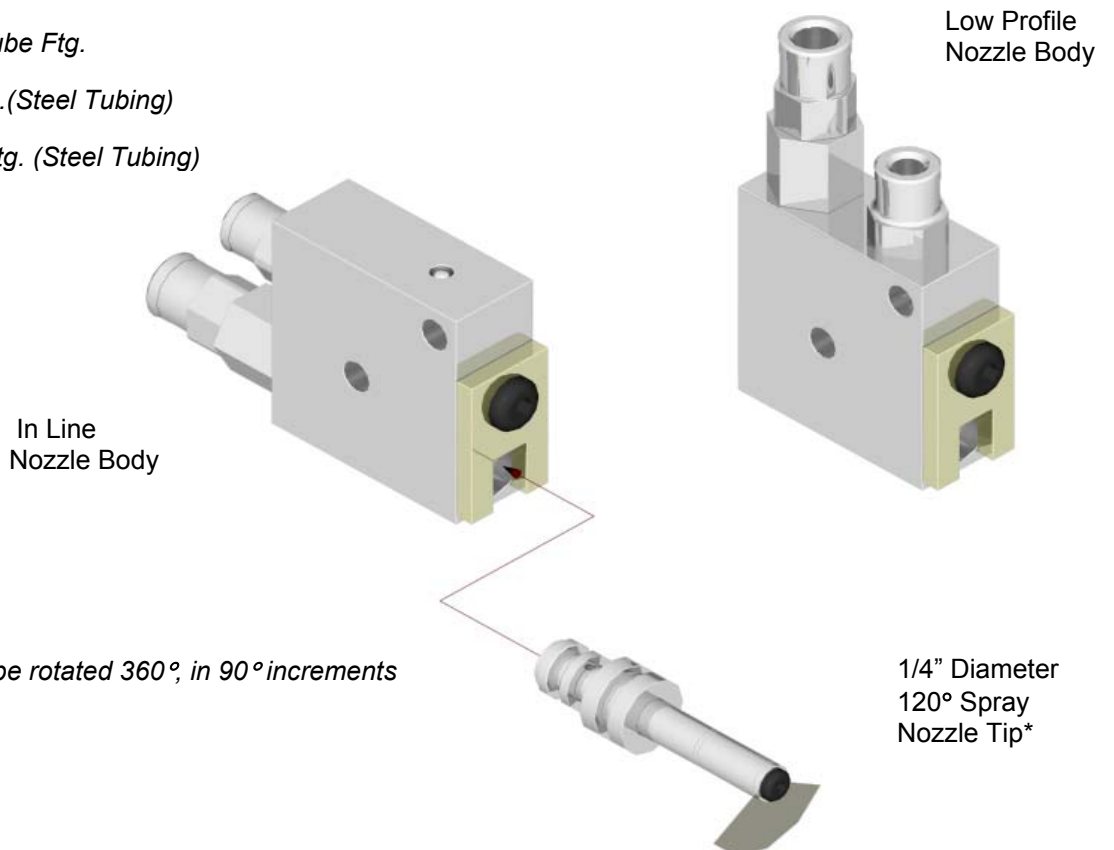


*120° Nozzle Tips can be rotated 360°, in 90° increments

Specifications:

Min./Max. temperature range: -15°F to 250°F (10°C to 121°C)
Fluid Type: Oil
Recommended viscosity range: 100SUS – 2000SUS (20cst – 440cst)
Seal Material: Viton
Check Ball material: Viton
Standard Oil Line size: Nylon: 3/16" Dia.
Steel: 1/8" Dia.
Standard Air Line size: Nylon/Steel 1/4" Dia.

Applications:

Metal Stamping
Metal Forming

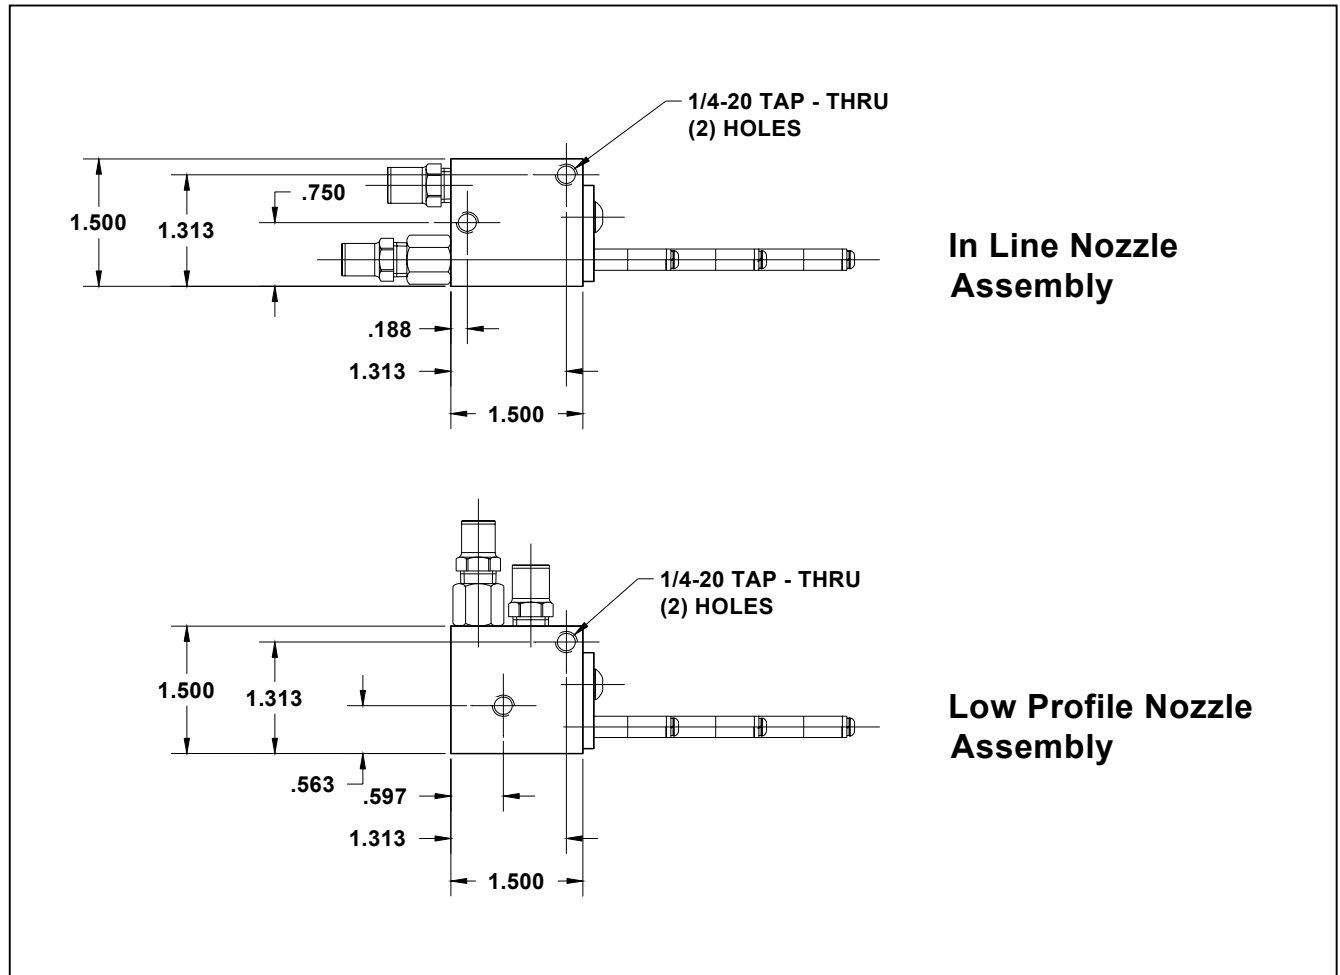

Replacement Nozzle Tip Part Numbers:

Tip Length	Spray Pattern Angle
	120°
1"	SFT-120-1
2"	SFT-120-2
3"	SFT-120-3