


CONTINUOUS-SPRAY, SWN NOZZLES HOW TO ORDER SHEET

Choose from three tip lengths and three spray patterns, for versatility in any continuous spray, design application. These nozzles feature 1/4-20 tapped (#10 screw clearance) mounting holes and durable, aluminum construction. The **Low Profile** nozzle provides a unique space saving design.

Part Number

	SWN				
<u>Body Style</u>					<u>Tip Length</u>
IL <i>In Line</i>					1 <i>One Inch</i>
SS-IL <i>Stainless Steel In Line</i>					2 <i>Two Inch</i>
LP <i>Low Profile</i>					3 <i>Three Inch</i>
SS-LP <i>Stainless Steel Low Profile</i>					
<u>Fittings</u>					<u>Spray Pattern Angle</u>
Oil Lines: Nylon: 3/16" O.D. Tubing Steel Tube: 1/8" O.D. Tubing					00 <i>0° (Straight)</i>
Air Lines: Nylon: 1/4" O.D. Tubing Steel Tube: 1/4" O.D. Tubing					45 <i>45°</i>
NC <i>Nylon Compression Ftg. - Standard</i>					90 <i>90°</i>

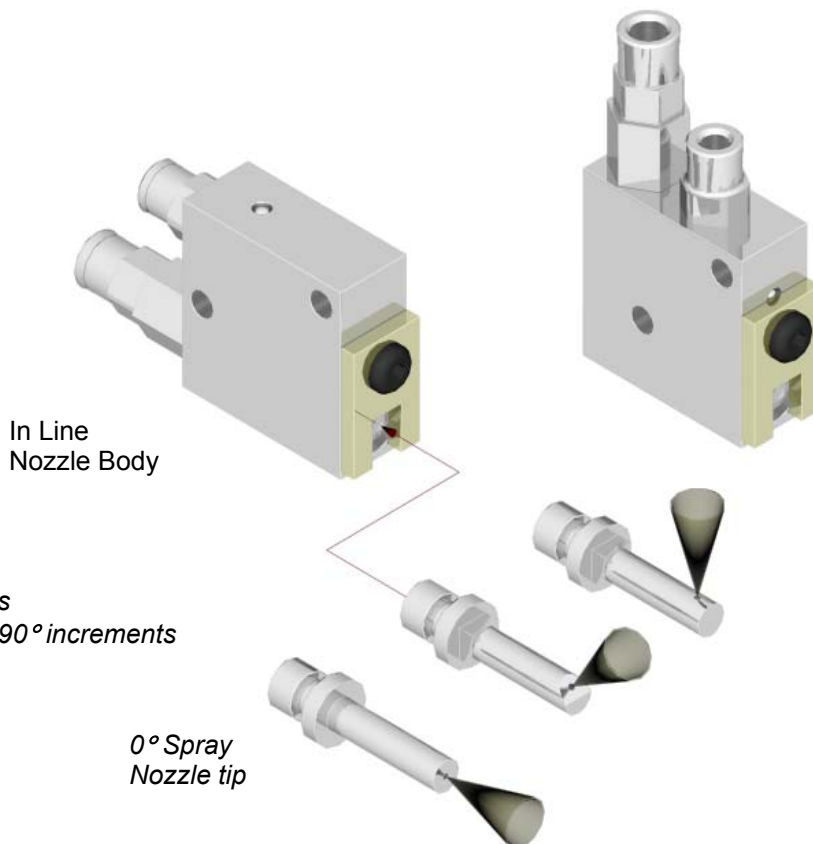

**45° and 90° Nozzle tips
can be rotated 360°, in 90° increments*

*0° Spray
Nozzle tip*

NY Nylon Push In Tube Ftg.

CS Carbon Steel Ftg. (Steel Tubing)

SS Stainless Steel Ftg. (Steel Tubing)

X No Fittings

Check Part Material.

Standard Oil Line size:


Standard Air Line size:

100°F (10°C to 121°C)
 1000PSI (20cst – 440cst)
 Viton
 Viton
 Nylon: 3/16" Dia.
 Steel: 1/8" Dia.
 Nylon/Steel 1/4" Dia.

Applications:

Chain
 Cable Coating
 Wire Coating
 Cut-off, milling, band saws
 Gears

Low Profile
 Nozzle Body

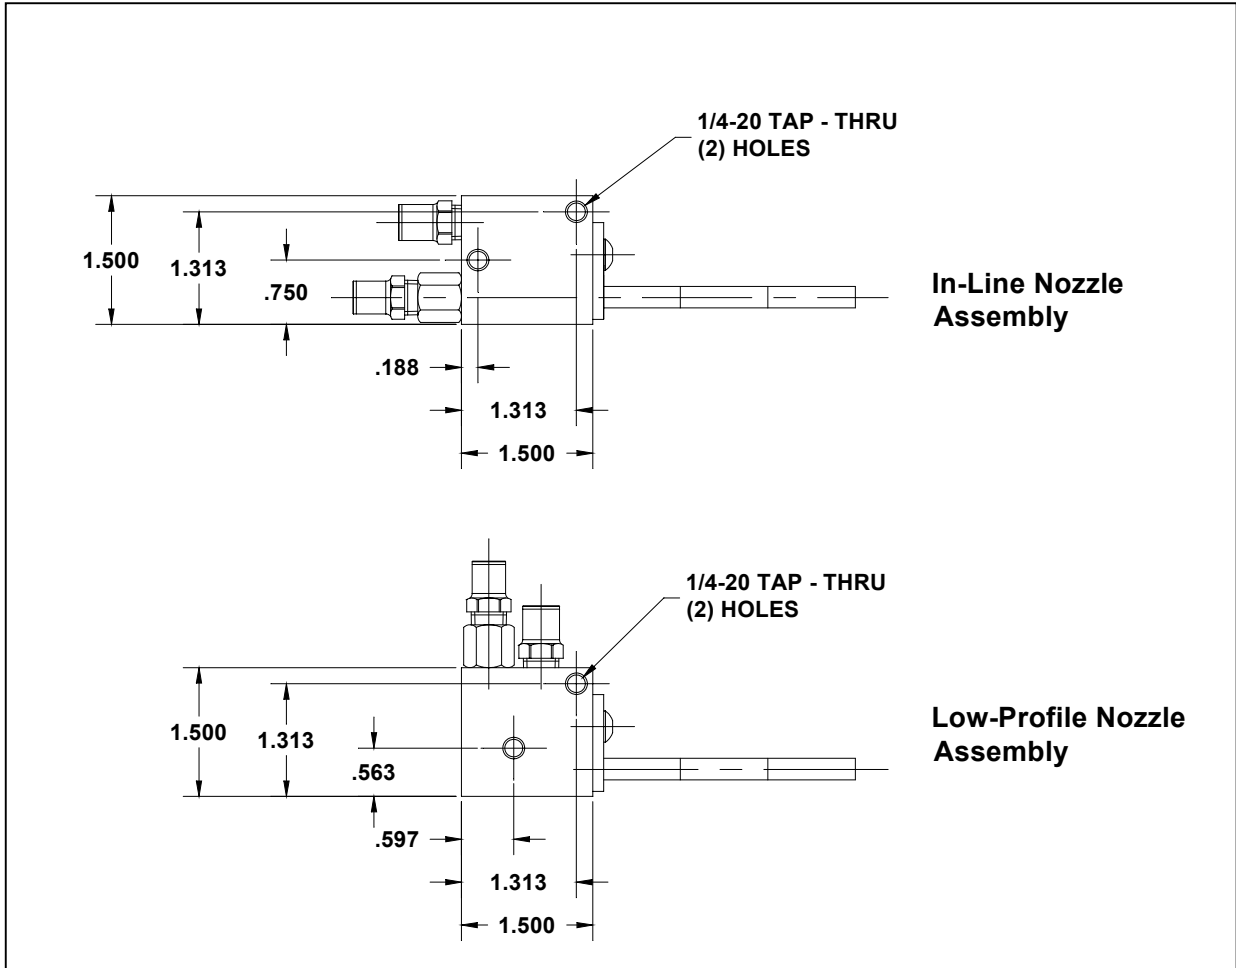

Replacement Nozzle Tip Part Numbers:

Tip Length	Spray Pattern Angle		
	0°	45°	90°
1"	SWT-00-1	SWT-45-1	SWT-90-1
2"	SWT-00-2	SWT-45-2	SWT-90-2
3"	SWT-00-3	SWT-45-3	SWT-90-3