



## Hi-Flow Nozzle(HFN) – Continuous Spray

### HOW TO ORDER SHEET

Choose from two different styled tips, for versatility in any continuous spray, design application. These nozzles feature durable, aluminum construction. The **Low Profile** nozzle provides a unique space saving design.

#### Specifications:


Min./Max. temperature range  
 Fluid type  
 Recommended viscosity range  
 Seal material  
 Check ball material  
 Standard oil line size  
 Standard air like size

#### Application(s):

**High-Speed Spindle**

#### Part Number

	<b>HFN</b>			
<b>Body Style</b>				
<i>IL In Line</i>				
<i>SS-IL Stainless Steel In Line</i>				
<i>LP Low Profile</i>				
<i>SS-LP Stainless Steel Low Profile</i>				
<b>Fittings</b>				
<i>NC Nylon Compression</i>				
<i>NY Nylon</i>				
<i>CS Carbon Steel (steel tubing)</i>				
<i>SS Stainless Steel (steel tubing)</i>				
<i>X Stainless Steel (steel tubing)</i>				
<b>Tip Style</b>				
<i>1 1/8" NPTF</i>				
<i>2 3/8-24</i>				

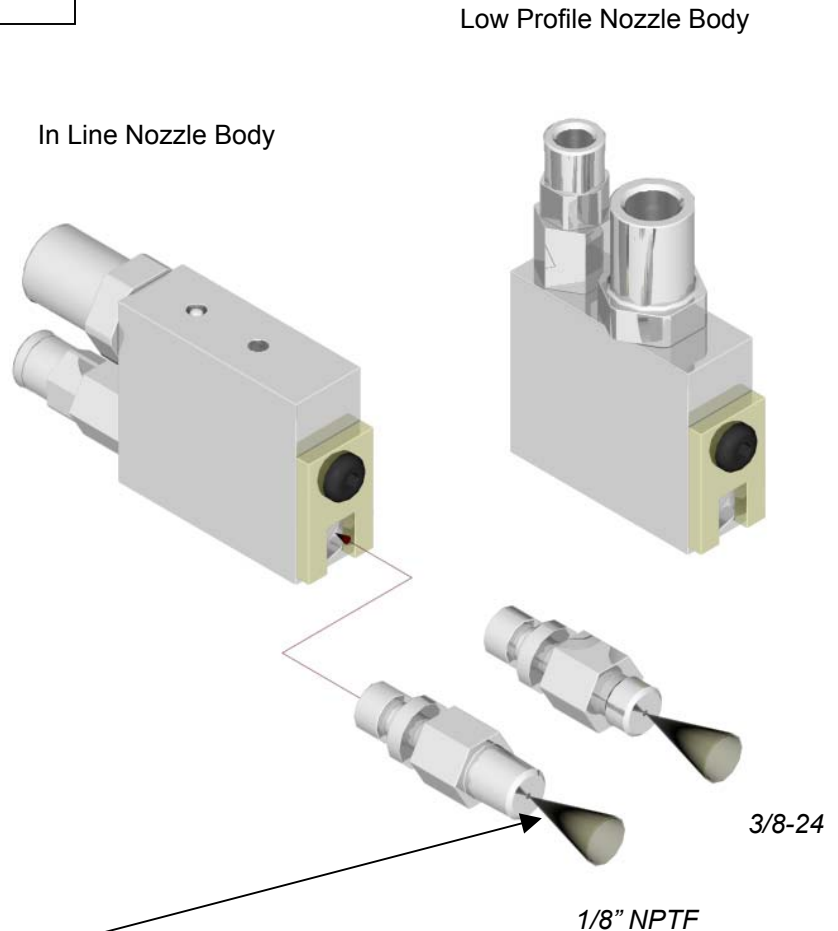

This design includes a threaded tip that mounts directly into the spindle housing.