


PULSE-SPRAY, TCN NOZZLE
HOW TO ORDER SHEET

Choose from three tip lengths and two spray patterns for versatility in any, pulsed spray, design application. These nozzles feature 1/4-20 tapped (#10 screw clearance) mounting holes and durable, aluminum construction. The **Low Profile** nozzle provides a unique space saving design.

Part Number

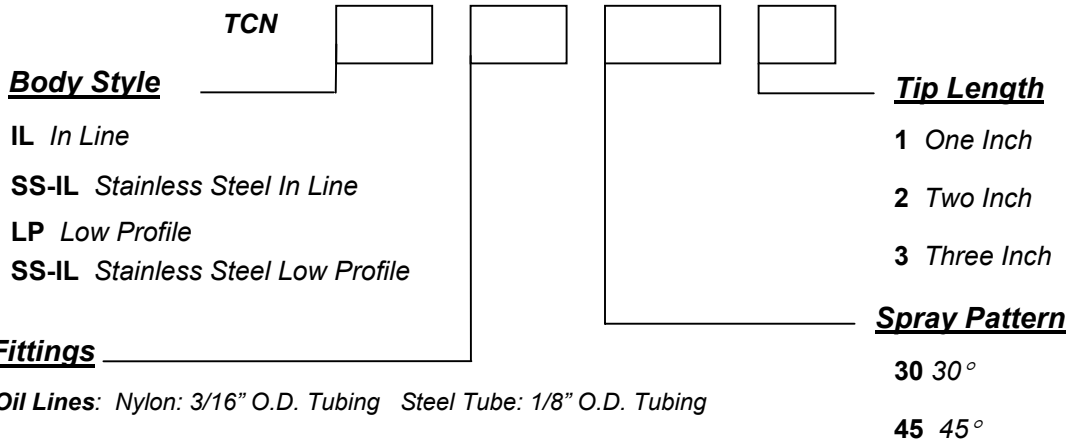

Fittings

Oil Lines: Nylon: 3/16" O.D. Tubing Steel Tube: 1/8" O.D. Tubing

Air Lines: Nylon: 1/4" O.D. Tubing Steel Tube: 1/4" O.D. Tubing


NC Nylon Compression Ftg. - **Standard**

NY Nylon Push In Tube Ftg.

CS Carbon Steel Ftg. (Steel Tubing)

SS Stainless Steel Ftg. (Steel Tubing)

X No Fittings

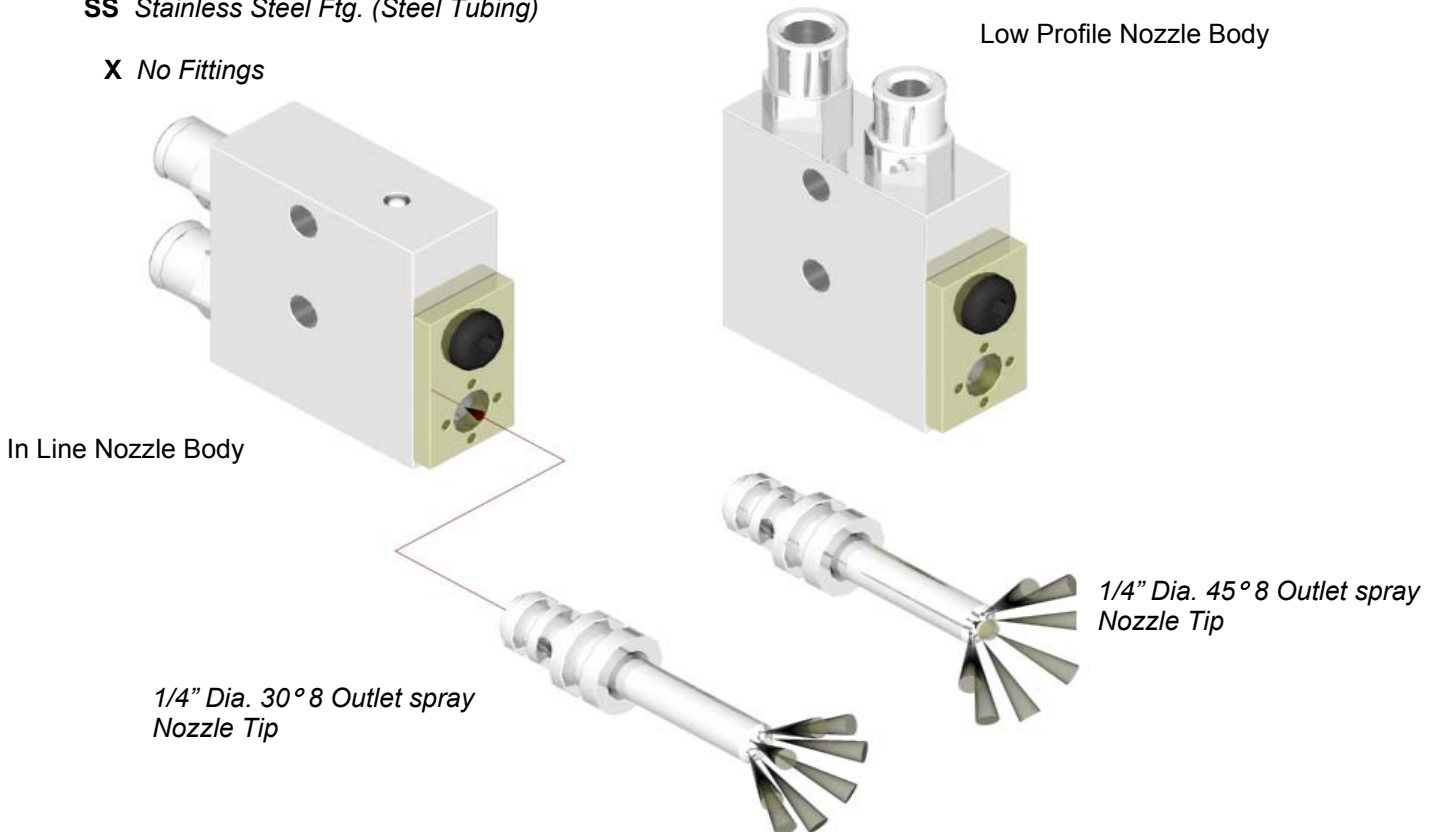


Specifications:

Min./Max. temperature range: -15°F to 250°F (10°C to 121°C)
 Fluid Type: Oil
 Recommended viscosity range: 100SUS – 2000SUS (20cst – 440cst)
 Seal Material: Viton
 Check Ball material: Viton
 Standard Oil Line size: Nylon: 3/16" Dia.
 Steel: 1/8" Dia.
 Standard Air Line size: Nylon/Steel 1/4" Dia.

Applications:

Bore Lubrication
 O-Ring Grooves
 Valve Guide Seats

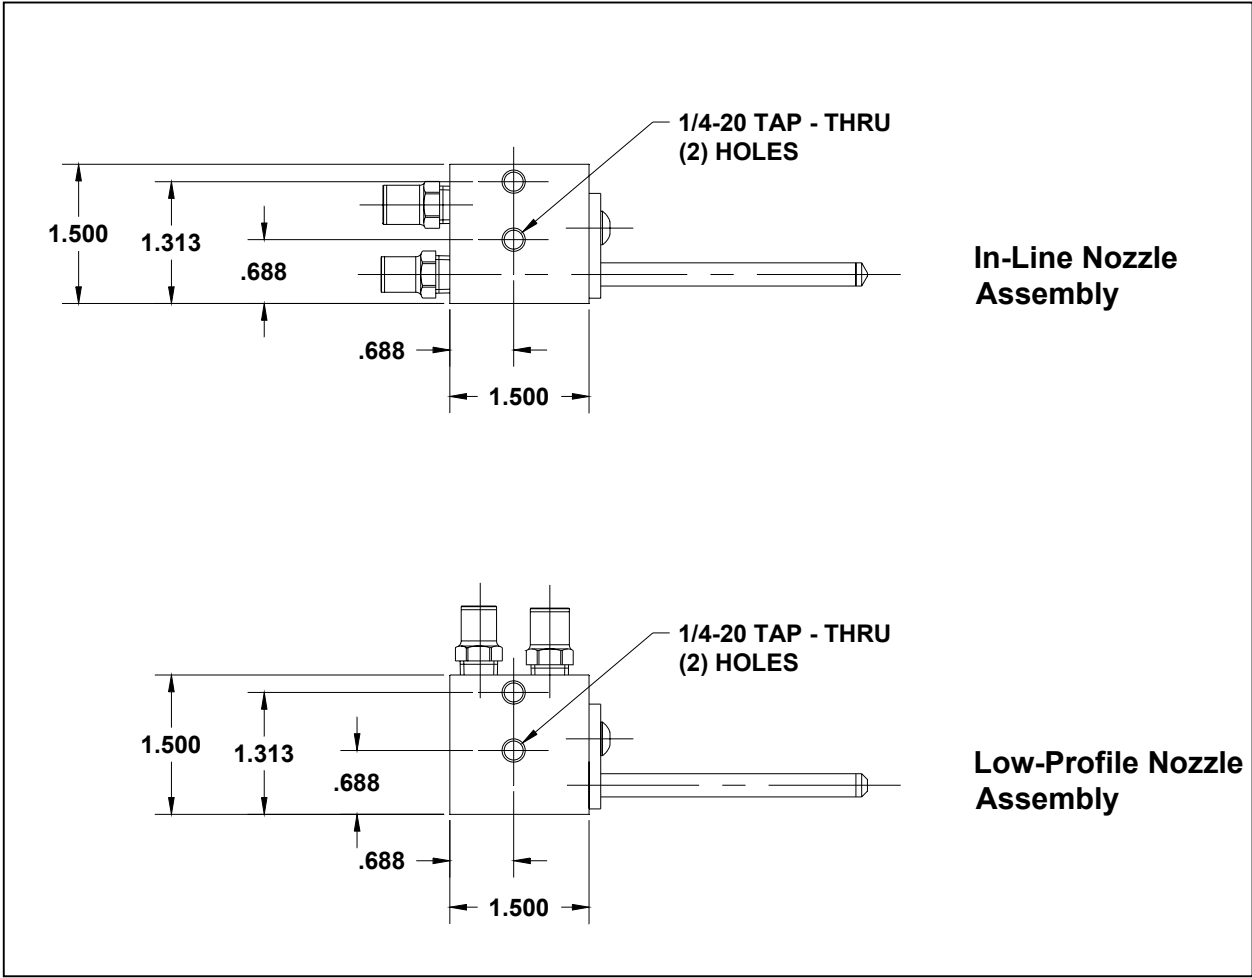

Replacement Nozzle Tip Part Numbers:

Tip Length	Spray Pattern Angle	
	30°	45°
1"	TCT-30-1	TCT-45-1
2"	TCT-30-2	TCT-45-2
3"	TCT-30-3	TCT-45-3